


ViewBoard IFP7533-G

Key Features

- Integrated with myViewBoard software
- Multi-tasking capabilities for enhanced lesson delivery
- Embrace simplicity and organization with the USB-C one-cable solution, offering 65W of Power Delivery.
- Intuitive user interface and fast app launch for smooth operation
- Powered by Android 11 Product **Description**



The ViewBoard IFP33 Series harmonizes a touch display with versatile software to create a comprehensive classroom solution for interactive and engaging learning. This interactive flat panel delivers exceptional image quality in 4K UHD, thanks to cutting-edge bonding technology that provides clearer colors, enhanced contrast, and reduced glare. The 40-point touchscreen interface, equipped with Ultra Fine Touch Technology, empowers students and teachers to collaborate seamlessly, using either their fingers or dual-tip pens, for an intuitive pen-onpaper experience. Powerful built-in front-facing speakers and a USB-C port sort out for a complete and convenient multimedia experience. The ViewBoard IFP33 Series is preinstalled with myViewBoard to offer advanced lesson delivery options for teachers and powerful device management tools for administrators.

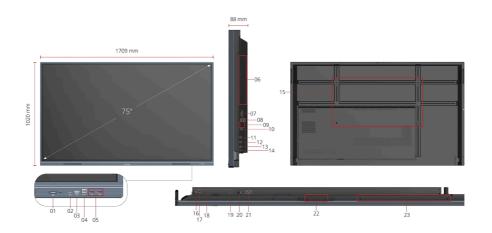

- 1. POWER ON/OFF
- 2. USB C
- 3 HDMI 1
- 4. TOUCH 1
- 5. USB 3.0x2 6 OPS Slot
- 7 RS-232
- 8. LAN
- 9. USB 2.0x2
- 10. TOUCH 2
- 11. HDMI 2
- 12. HDMI 3
- 13. HDMI OUT 14 USB
- 15. VESA® Wall Mount (800x400mm) 22. Wi-Fi Slot

23. Sensor Mount

- 16. SPDIF
- 17 AUDIO in
- 18. AUDIO out
- 19. VGA 20 Power On/OFF
- 21 AC IN



\mathbf{r}	10	ΡI	Λ	v
1)	١,	וש	Δ	·Y

DISPLAY		В
Panel Size:	75"	
Panel Type:	TFT LCD Module with DLED Backlight. IPS	
Display Area (mm):	1649.664(H) × 927.936(V) (74.6" diagonal)	
Aspect Ratio:	16:9	
Resolution:	UHD 3840x2160(Pixels)	
Colors:	1.07B colors	S
Brightness:	350 nits	
Contrast Ratio:	5000:1 (max. with DCR enabled)	
Response Time:	8ms	
Viewing Angles:	H=178, V=178	
Backlight Life:	50,000 Hours (8 hours of use per day)	P
Surface Treatment:	Hardness: 7H Anti- glare coating	
Orientation:	Landscape	_
PLATFORM		E
Processor:	Quad-core ARM Cortex (A55*4)	C
RAM:	8GB DDR4	
Storage:	128 GB	
TOUCH		_
Type/ Tech:	Ultra Fine Touch Technology	C
Touch Point:	40 points touch	
INPUT	LIDMI IN O.O O	
HDMI:	HDMI-IN 2.0 x 3 (3840x2160 @60Hz)	۷
RGB / VGA:	x1	
Audio:	x1	
RS232:	x1	R
OPS:	x1 (Optional Intel Standard OPS)	į
WiFi:	x1 (Optional VB-WIFI- 002/VB-WIFI-004/VSB- 050)	P
OUTPUT		
HDMI:	HDMI 2.0 x1	
Audio:	x1	C
SPDIF:	x1	
LAN		
RJ45:	x2	
Type A:	USB3.0 x4 (Front x2, Rear x2); USB2.0 x1	
Туре В:	x2 (Front x1, Rear x1)	
Type C:	Frontx1 (PD65W + DP1.2 + Data USB2.0 + 10M/100M sharing)	

+ 10M/100M sharing)

myViewBoard Whiteboard				
myViewBoard for Windows (Embedded in optional Windows Slot- in PC)				
myViewBoard Display				
Yes				
SPECIAL FEATURES				
(combine slot-in PC/Android/HDMI USB port) Front "SmartPort™ USB" to all channels.				

Simple LAN sharing between IFP and slot-in device:

10/100M for Android & Slot-in PC

Light Sensor:

Yes

POWER

100-240V AC Voltage: Consumption: On:106W; Off: ≤ 0.5W

ERGONOMICS

Wall Mount (VESA®): 800x400

OPERATING CONDITIONS

Temperature (° C): 0°C to 40°C 20% ~ 80% RH non-Humidity: condensing

DIMENSIONS (W X H X D)

1709 x 1020 x 88 mm / Physical (inch / mm): 67.3 x 40.2 x 3.5 in 1863 x 1140 x 225 mm Packaging (inch / mm): / 73.3x 44.9 x 8.6 in

WEIGHT

Net (lb / kg): 104.3lb/47.3kg Gross (lb / kg): 133.5lb/60.55kg

REGULATIONS

FCC/ICES003, EPEAT, CE EMC, LVD or CB, RoHS Green BOM & RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE, BSMI,BIS

PACKAGE CONTENTS

1. 3m power cord by ship area 2. Remote control with AAA battery 3. 3m touch USB cable 4. Touch pen x 2 (VB-PEN-009) 5. Quick Start Guide + Compliance statement 6. RS232 adapter 7. Clamp x 5 8. Camera Plate 9. Screw x 8 (camera 2+2, wall mount 4) 10. HDMI cable 3m

COMPATIBLE SLOT-IN PC

VPC2-O series/VPC2-O-1B series/VPC12-WPO-15/16

SPEAKERS

16W x 2

Yes

EMBEDDED OS

Android 11

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.